

UVC160

R3HAB.PRO GMBH // 2026.02.10

DUAL UV CORE

SUITABLE FOR **DN800 TO DN1600**

IN DIAMETER

ELECTRICALLY ADJUSTABLE LIGHT CORES

FOR USE WITH THE MOBILE SYSTEM **UVS150P**
AND THE BUILT-IN SYSTEM **UVS300**

2 X 4 **1000W/650W** UV-LAMPS

OPTIMIZED DUAL PISTON LIGHTS

3 IR SURFACE SENSORS

SENSOR FOR MEASURING
THE INTERNAL PIPE TEMPERATURE

FULL HD FRONT CAMERA


FULL HD REARVIEW CAMERA

DIMENSIONS: 1255 X 500 X 500 MM
(49.5" X 19.7" X 19.7") PER CORE

CIRCUMFERENCE: 580MM (23")

WEIGHT: 2 X 34 KG (2 X 75 LBS)

ONLINE USER MANUAL

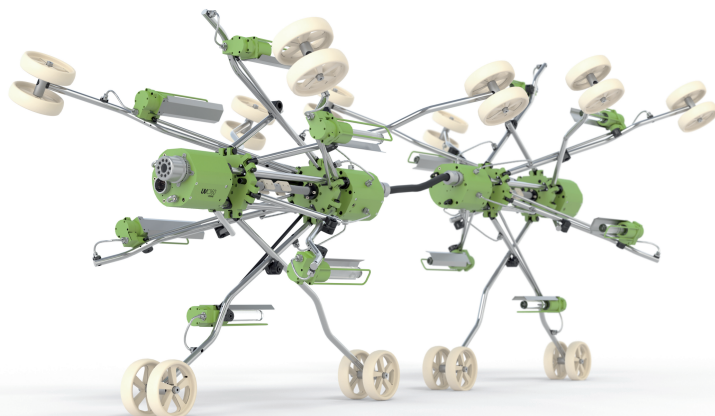

ACCESSOIRES

TOOL FOR MANUAL EXPANSION
AND CONTRACTION OF THE CORE
TRANSPORT BOXES

INFORMATION | **ONLINE**



COMPACT AND POWERFUL.

COMPACT AND POWERFUL
DUAL UV CORE **DN800 TO DN 1600**

R3HAB^{PRO}